


Outline (mm)

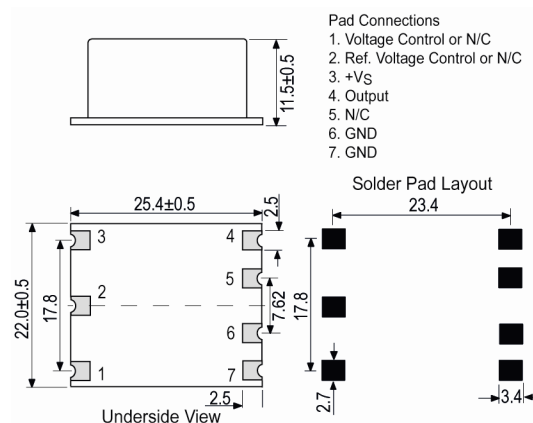

Description

- Small SMD case style/low height with hermetically sealed oven controlled crystal oscillator (OCXO)
- Tight temperature stability
- Low phase noise and short term stability optimised design
- AT-Cut and SC-Cut crystal designs
- Optional reference voltage

Please note: This document is intended to illustrate the general capability and versatility of IQD's design. For specific enquiries please contact one of IQD's sales offices where we can tailor a unique specification to meet your needs.

Frequency Parameters

- Frequency: 10.0MHz to 40.0MHz
- Frequency Stability: ±3.00ppb to ±5.00ppb
- Developed Frequency: 10.0MHz, 13.0MHz, 16.3840MHz, 32.7680MHz, 38.40MHz
- Frequency Tolerance Example: ±500ppb
Measurement at 25°C reference to nominal frequency.
- Frequency Stability vs Temperature Range:
Tightest Stability: ±3ppb 0 to 60°C
Widest Temperature Range: ±5ppb -40 to 75°C
- For other frequency/specification combinations please contact our sales offices
- Ageing (after 30 days of continuous operation, referred @ 25°C):
Ageing per day: ±0.5ppb max
After 1st year: ±50ppb max
After 10 years: ±300ppb max
- Supply Voltage Coefficient Example: ±1ppb ref Vs±5%
- Load Coefficient Example: ±1ppb ref ±5% load change

Sales Office Contact Details:

UK: +44 (0)1460 270200

USA: +1 760 668 8935

Email: info@iqdfrequencyproducts.com

Web: www.iqdfrequencyproducts.com

Electrical Parameters

- Supply Voltage 3.3V
- Supply Voltage: Available in 12.0V, 5.0V and 3.3V
- Current Consumption:
 - 12.0V @ 25°C steady state, 180mA max
 - 12.0V Warm-up, 350mA max
 - 5.0V @ 25°C steady state, 200mA max
 - 5.0V Warm-up, 500mA max
 - 3.3V @ 25°C steady state, 350mA max
 - 3.3V Warm-up, 800mA max
- Reference Voltage Output: Customer specified value
(A very stable DC output voltage, made available to the designer for use with a voltage divider circuit on the Voltage Control Input)

Frequency Adjustment

- Frequency Adjustment Range: $\pm 1000\text{ppb}$ to $\pm 2000\text{ppb}$
- Control Voltage Example:
 - For 3.3V supply: $1.65\text{V} \pm 1.65\text{V}$
 - For 5.0V supply: $2.5\text{V} \pm 2.5\text{V}$
- Linearity Example: 10% max
- Input Impedance Example: 100kohms
- Slope (standard): Positive

Operating Temperature Ranges

- 0 to 60°C
- -40 to 75°C

Output Details

- Output Compatibility HCMOS/Sinewave
- Available with either HCMOS or Sinewave output
- HCMOS Typical Parameters (15pF load):
 - Rise and fall time: 10ns max
 - Duty Cycle 45/55%
- Sinewave Typical Parameters (50ohm load):
 - Output Level: 6 to 10dBm
 - Harmonic Suppression: -30dBc max
 - Spurious Suppression: -60dBc max

Noise Parameters

- Phase Noise typical figures @ 10.0MHz (dBc/Hz):

Offset	Typ	Max
1Hz	-90	-80
10Hz	-120	-110
100Hz	-140	-130
1kHz	-145	-140
10kHz	-150	-145
100kHz	-150	-145
- Allan Variance Example: $5\text{E}-11$ for 1s

Environmental Parameters

- Storage Temperature Range: -55 to 105°C
- Vibration: IEC 68-2-06 Test Fc, Test condition 0.75mm 10G acceleration 10Hz to 500Hz, one cycle per 30mins 2hrs test time
- Shock: IEC 68-2-27, 50G, 11ms, half sine, 3 times in 3 directions

Sales Office Contact Details:

UK: +44 (0)1460 270200

USA: +1 760 668 8935

Email: info@iqdfrequencyproducts.com

Web: www.iqdfrequencyproducts.com

Ordering Information

- Minimum data needed to open an enquiry:-
 - Frequency
 - Model
 - Supply Voltage
 - Output
 - Frequency Stability (over operating temperature range)
 - Operating Temperature Range
 - Frequency Adjustment
 - Reference Voltage Output

Compliance

- RoHS Status (2015/863/EU) Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

Packaging Details

- Pack Style: Bulk Supplied tube or box packaging
Pack Size: 75
- Pack Style: Reel Tape & reel in accordance with EIA-481-D
Pack Size: 75

Electrical Specification - example values 3.3V

Frequency Min	Frequency Max	Temperature Range	Stability (Min)	Current Draw	Rise and Fall Time	Duty Cycle
		°C	ppb	mA	ns	%
10.0MHz	40.0MHz	0 to 60	±3.0	-	10	45/55
		-40 to 75	±5.0	-	10	45/55

This document was correct at the time of printing; please contact your local sales office for the latest version.

[Click to view latest version on our website.](#)

Sales Office Contact Details:

UK: +44 (0)1460 270200

USA: +1 760 668 8935

Email: info@iqdfrequencyproducts.com

Web: www.iqdfrequencyproducts.com