

ISSUE 14; July 2016

### Description

- Industry standard leaded package.  
Resistance welded, hermetically sealed in an inert atmosphere, glass to metal seals on leads.  
Variants available include but are not limited to:-  
3L = a centre mounted third leg grounds the can  
SMD = Gull-Wing version  
Please contact our sales offices for more options  
HC45 package is not dimensionally identical to the UM1 but for most applications the two packages are interchangeable  
For UM4 and UM5 package type please contact the sales offices
- -3L 3 Lead
- 3 Lead version
- -3L-SMD 3L-Surface Mount
- 3 Lead Surface Mount Device
- Standard 2 pin version
- -SMD Surface Mount Device
- Surface Mount Device

### Frequency Parameters

- |                       |                        |
|-----------------------|------------------------|
| ■ Frequency           | 6.0MHz to 175.0MHz     |
| ■ Frequency Tolerance | ±5.00ppm to ±100.00ppm |
| ■ Frequency Stability | ±5.00ppm to ±100.00ppm |
| ■ Ageing              | ±3ppm typical per year |

### Electrical Parameters


- |                          |                  |
|--------------------------|------------------|
| ■ Load Capacitance (CL)  | 10.0pF to 75.0pF |
| ■ Shunt Capacitance (C0) | 7pF max          |
| ■ Drive Level            | 1mW max          |

### Operating Temperature Ranges


- 0 to 50°C
- -10 to 60°C
- -20 to 70°C
- -30 to 80°C
- -40 to 85°C
- -55 to 105°C
- -55 to 125°C

### Environmental Parameters


- Storage Temperature Range: -55 to 125°C
- Shock: 981m/s<sup>2</sup>, 6ms, 3 times in each of 3 mutually perpendicular planes
- Vibration: 10Hz-60Hz, 0.75mm amplitude, 60Hz-2000Hz, 98.1m/s<sup>2</sup>, 30mins in 3 mutually perpendicular planes

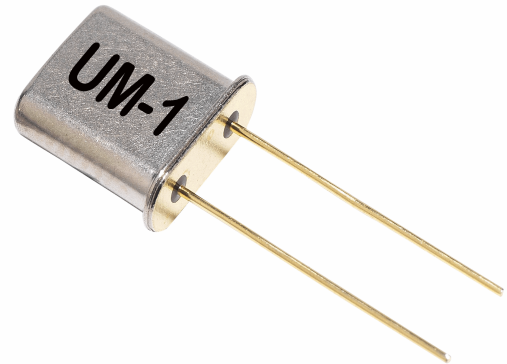

### Outline (mm)

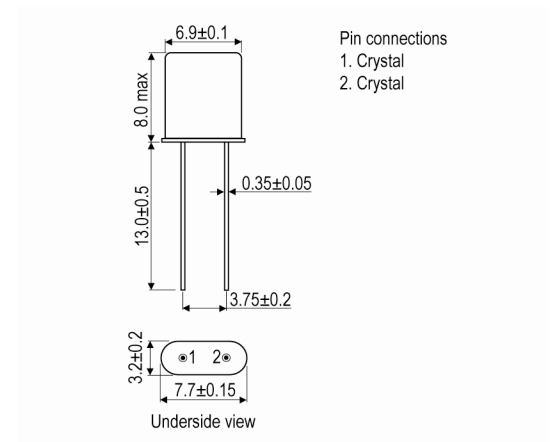

### Outline (mm) -SMD = Surface Mount Device

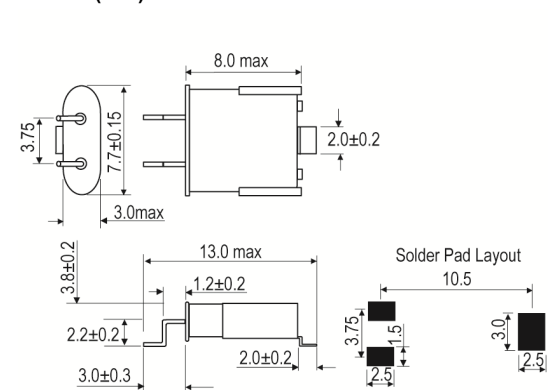

### Sales Office Contact Details:

UK: +44 (0)1460 270200  
Germany: 0800 1808 443

France: 0800 901 383  
USA: +1.760.318.2824

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)

**Ordering Information**

- Frequency\*
- Model\*
- Frequency Tolerance (@ 25°C)\*
- Frequency Stability (over operating temperature range)\*
- Operating Temperature Range\*
- Load Capacitance\*
- Overtone\*
- (\*minimum required)
- Example
- 10.0MHz UM1
- 50/50/-40 to 85C/10 FUND


**Compliance**

- RoHS Status (2011/65/EU)      Compliant
- REACH Status                      Compliant
- MSL Rating (JDEC-STD-033):    Not Applicable

**Packaging Details**

- Pack Style: Reel      Tape and reel in accordance with EIA-468-C (leaded product) or EIA-481-D (SMD product)
- Pack Size: 1,000
- Pack Style: Bulk      Loose in bulk pack
- Pack Size: 100

**Outline (mm) -3L = 3 Lead**

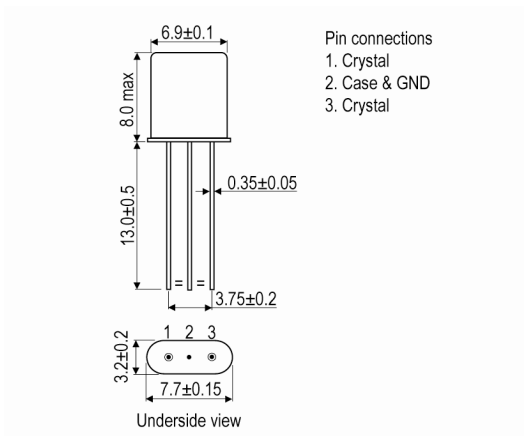

**Sales Office Contact Details:**

UK: +44 (0)1460 270200  
Germany: 0800 1808 443

France: 0800 901 383  
USA: +1.760.318.2824

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)

Electrical Specification - maximum limiting values

Frequency Min	Frequency Max	Temperature Range	Stability (Min)	Over Tone Order	ESR
		°C	ppm		Ω
6.0MHz	9.999999MHz	0 to 50	±10	Fundamental	80
		-10 to 60	±15		
		-20 to 70	±15		
		-30 to 80	±20		
		-40 to 85	±25		
		-55 to 105	±50		
		-55 to 125	±50		
10.0MHz	14.999999MHz	0 to 50	±10	Fundamental	60
		-10 to 60	±15		
		-20 to 70	±15		
		-30 to 80	±20		
		-40 to 85	±25		
		-55 to 105	±50		
		-55 to 125	±50		
15.0MHz	30.0MHz	0 to 50	±5	Fundamental	30
		-10 to 60	±5		
		-20 to 70	±10		
		-30 to 80	±20		
		-40 to 85	±25		
		-55 to 105	±50		
		-55 to 125	±50		
25.0MHz	90.0MHz	0 to 50	±5	3rd Overtone	45
		-10 to 60	±5		
		-20 to 70	±10		
		-30 to 80	±20		
		-40 to 85	±25		
		-55 to 105	±50		
		-55 to 125	±50		
60.0MHz	150.0MHz	0 to 50	±5	5th Overtone	100
		-10 to 60	±5		
		-20 to 70	±10		
		-30 to 80	±20		
		-40 to 85	±25		
		-55 to 105	±50		
		-55 to 125	±50		
125.0MHz	175.0MHz	0 to 50	±5	7th Overtone	200
		-10 to 60	±5		
		-20 to 70	±10		
		-30 to 80	±20		
		-40 to 85	±25		
		-55 to 105	±50		
		-55 to 125	±50		

\*Stability Maximum values ±100ppm

Sales Office Contact Details:

UK: +44 (0)1460 270200  
Germany: 0800 1808 443

France: 0800 901 383  
USA: +1.760.318.2824

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)



*This document was correct at the time of printing; please contact your local sales office for the latest version.  
[Click to view latest version on our website.](#)*

---

**Sales Office Contact Details:**

UK: +44 (0)1460 270200  
Germany: 0800 1808 443

France: 0800 901 383  
USA: +1.760.318.2824

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)